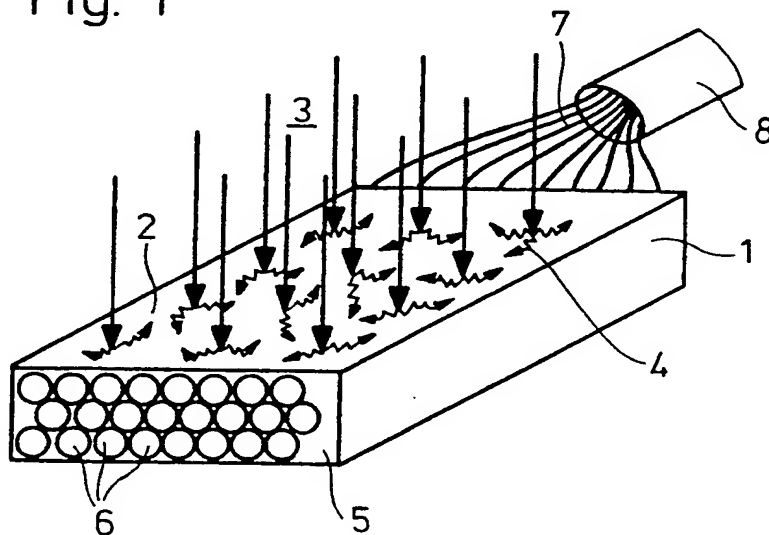(54) **Neutron and/or gamma radiation detecting system**

(57) In a neutron and/or gamma radiation detection system, a large reception surface 2 for the radiation to be detected is formed on a body of scintillation material 1 which is adapted to convert neutron or gamma radiation into light energy. A large number of fiber light conductors 6 is embedded in the body of scintillation material such that the fibers extend essentially parallel and fully across the reception surface of the body of scintillation material. The light energy, upon propagation along the fiber light conductors, is coupled into the conductors along the surface of the fibers, which fibers are unisotropic.

This arrangement permits the use of unisotropic light conductor systems which, in contrast to optically isotropic systems, provide for a separation of light collecting and light transmitting functions which results in a substantial reduction of light absorption losses during light transmission so that most of the light energy coupled into the fiber light conductors reaches the optoelectronic amplifier coupled to the end of the light conductors.

Fig. 1



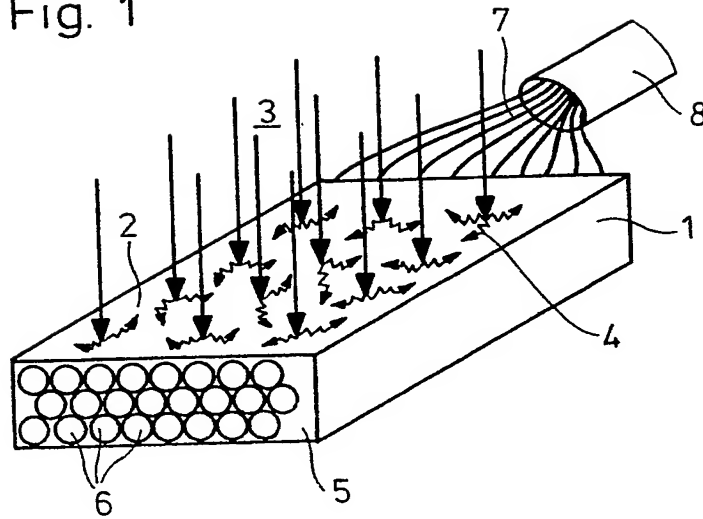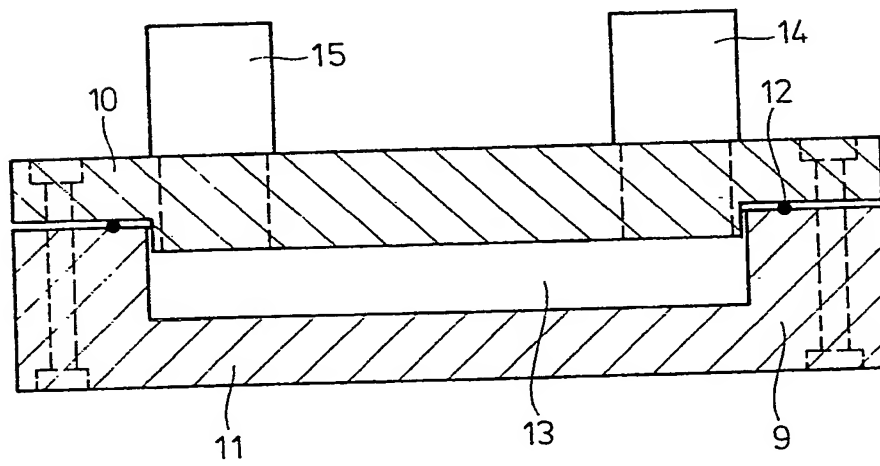GB 2 149 193 A

Fig. 1

Fig. 2

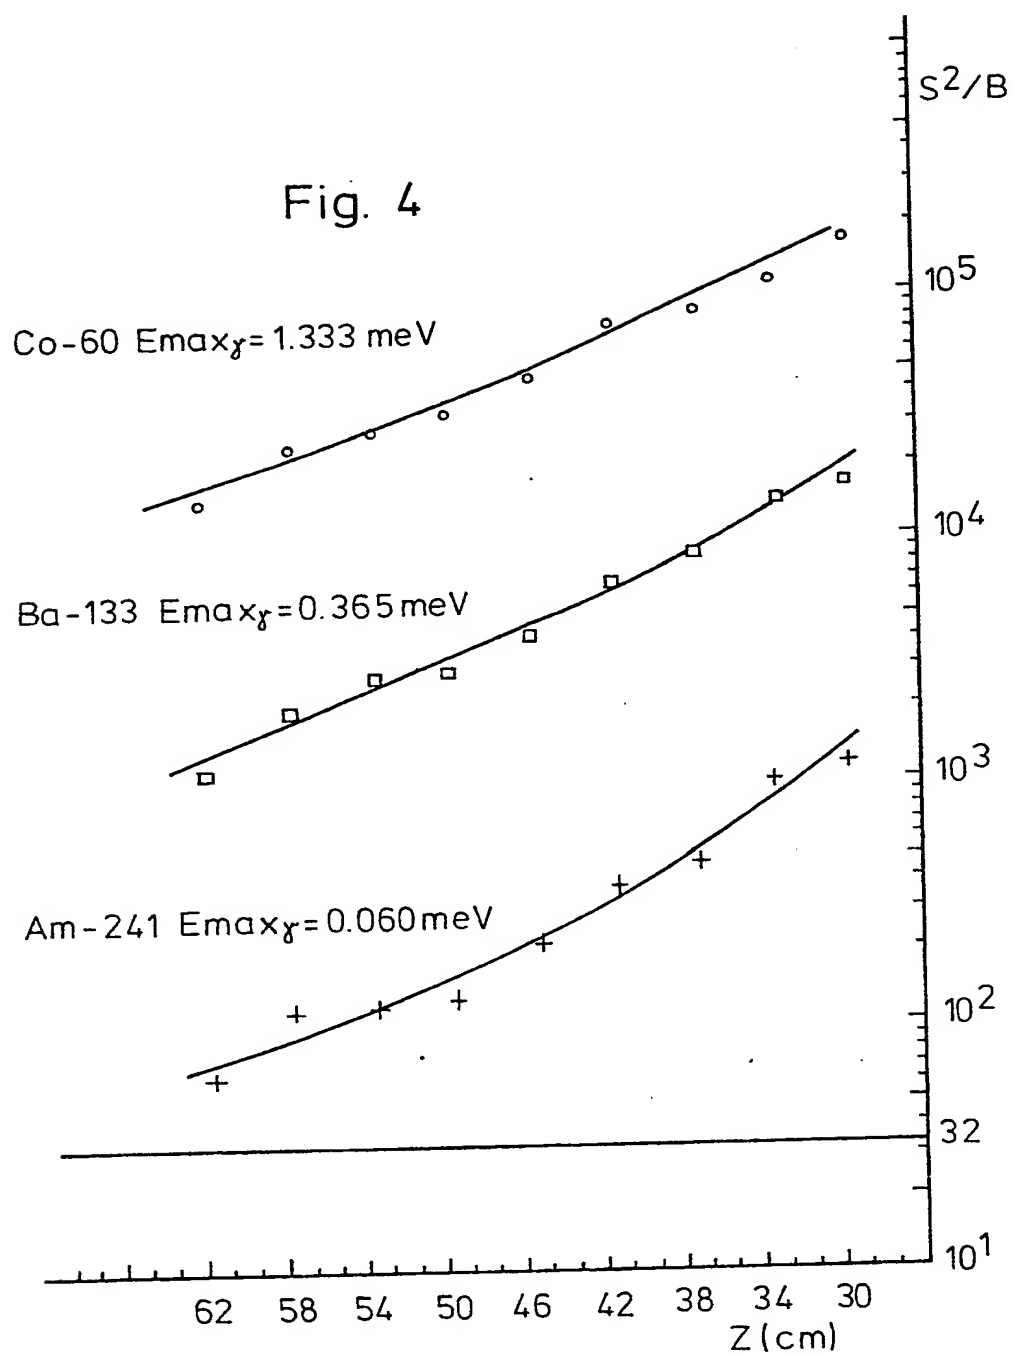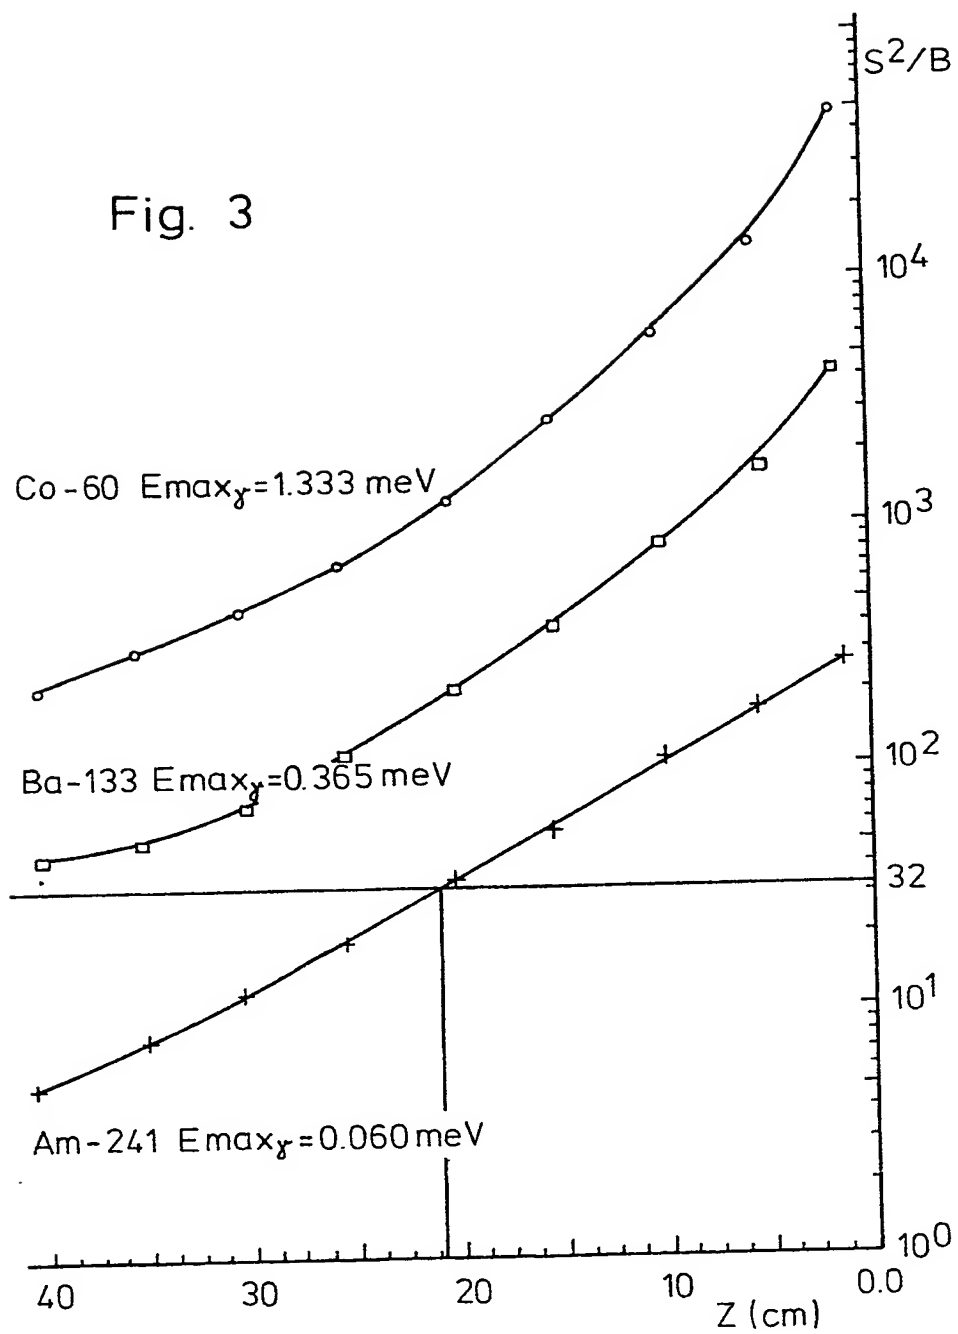Fig. 4

2149193



Fig. 3

Co-60 $Emax_\gamma = 1.333\, meV$

Ba-133 $Emax_\gamma = 0.365\, meV$

Am-241 $Emax_\gamma = 0.060\, meV$

$S^2/B$

$10^4$

$10^3$

$10^2$

32

$10^1$

$10^0$

40   30   20   10   0.0

Z (cm)

SPECIFICATION

**Neutron and/or gamma radiation detecting system**

5 *BACKGROUND OF THE INVENTION*                                                                 5
The invention relates to a neutron and/or gamma radiation detecting system with a large
reception area for the radiation to be detected, which radiation generates in scintillation
materials light energy that is coupled into fiber light conductors. The system is especially
suitable for use in connection with revolving door safety locks.
10     Neutron detection is utilized as a supplementary measure in connection with lock structures    10
for the detection of unauthorized passage of nuclear materials. This measure increases the
chances of detecting the transfer of nuclear materials out of controlled areas without permission
since measures adapted to avoid detection of neutron radiation are substantially more involved
than measures which avoid the detection of γ radiation.
15     ZnS(Ag) is one of the compounds with the highest scintillation available for the purpose of    15
neutron detection. However, in order to provide an effective detector, efficient light collection
and its transmission from the scintillator to the photomultiplier are necessary. The light collector
arrangements utilized so far are as follows:
       In a publication [1], a detector disc is mounted directly on the photomultiplier (PTM), the
20 detector disc being disposed in the entrance window for the radiation. In this arrangement the     20
light transmission path is short and transmission losses are therefore small. A disadvantage,
however, is that the coupling cross-section is limited by the size of the window of the
photomultiplier utilized. In another arrangement as disclosed in publication [2], a substantially
larger usable coupling cross-section (five times larger) is obtained by the use of light guide
25 plates integrated into the scintillator but these units can be built only in small sizes with only a   25
small angle of reception which would cover only a small part of a revolving door chamber, for
example.
       The disadvantage of light conductors as they are presently used are:
       Scattering losses in the contact area between light conductors and the optically denser
30 scintillator materials.                                                                          30
       Attenuation losses (light absorption in the necessary transmission length).
       Unfavorable surface ratios between light conductor cross-section and collector surface
(decoupling area).
       The decoupling efficiency of larger scintillator crystals, dependent on the index of refraction, is
35 in the range of 5–11%.                                                                            35
       The values given for the coupling and transmission efficiencies of isotropic light conductors
(with interface areas with material of optically low density, i.e., air) show that, for scintillators
with large surface areas, suitable optical systems have to comply with the following require-
ments:
40     Decoupling of light source and light conductor by interposing an optical intermediate layer    40
with an index of refraction which is smaller than that of the scintillator (n≈1.5) so as to avoid
scattering losses at the interface.
       Coupling of a light intensity sufficient for the transmission distance between the scintillator
and the photomultiplier.
45     Feeding of the light into the fibers through their face areas is utilized in connection with low   45
level light amplifiers and large display areas as shown in a publication [3]—in reverse of a
detector application. A disadvantage, however, is a need for a relatively large amount of fiber
material and a relatively low reduction factor achievable for the coupling-in surface/uncoupling
surface ratio.
50     The object of the present invention is to provide a large area detection system of the type     50
described which, however, permits utilization of an effective scintillation material and also to
take advantage of the properties of fibers for the transmission of light to the detector systems.

*SUMMARY OF THE INVENTION*
55     A neutron and/or gamma radiation system which includes a body of scintillation material in    55
which light is generated by the neutron or gamma radiation to be detected has embedded into
the body of scintillation material a plurality of fiber light conductors into which the light
generated by the neutron or gamma radiation is coupled for transmission to a detector circuit.
The body of scintillation material has a large radiation reception surface and the fiber light
60 conductors are preferably so embedded therein that they extend parallel to, and fully across, the    60
reception surface such that the light generated in the scintillation material and propagating
along the fiber light conductors is coupled into the conductors, through the conductors' side
surfaces, which conductors are unisotropic and through which the light is transmitted without
any substantial losses.
65     With this arrangement, unisotropic light conductor systems can be utilized which, in contrast    65

to the optically isotropic systems, result in a separation of light collecting and light conducting functions. This provides for a substantial reduction of light absorption losses in large-space detector systems. The light intensity coupled in through the light conductor surface reaches the optoelectronic amplifier coupled to the end of the light conductor essentially without any losses.

5      The light coupling mechanism utilized for coupling the light through the fiber surface is based on the synchronization of the phase velocities and direction of polarization of the surface wave components of the resonance frequencies excitable in the fiber core.

It has been confirmed by experiments that, with fibers having a circular cross-section, light may be coupled into fibers through the fiber cylinder surfaces because of the geometry of the

10  electromagnetic fields. The mode volume (that is, the number of possible natural frequencies), which increases with increasing fiber core radius or fiber diameter, increases the probability of synchronization of both fields within the fiber. This is especially important for the coupling of incoherent light with timely and spatially stochastic phase changes.

Although these properties of cylindrical symmetrical fibers are known, they have been utilized,

15  so far, in limited applications such as:

Unisotropic thin-film light guides in a planar geometry which lead to other limiting conditions for the coupling of light upon utilization of the optical tunneling effect.

The coupling of coherent light sources (lasers) which lead to stationary coupling conditions.

However, these properties have not been utilized technically, that is, optically unisotropic fiber

20  light conductors have not been utilized in connection with neutron detectors.

### SHORT DESCRIPTION OF THE DRAWINGS
*Figure 1* shows a fiber detector in principle,
*Figure 2* shows an area detector element in cross-section,

25      *Figure 3* is a graph showing the signal/background noise ratio relative to the center of a detector plate, and
*Figure 4* shows the signal/background noise ratio depending on the distance from the photomultiplier at the end of the fiber light conductor.

### DESCRIPTION OF THE PREFERRED EMBODIMENT

30      As shown schematically in Fig. 1, a fiber detector 1 has a reception surface 2 for the coupling of light, the surface 2 being formed on a prismatic body 5 (ZnS(Ag)/boron matrix). The neutron flux (3) generates in the scintillation material of the body 5, flashes of light which light is collected by the parallel fibers 6 disposed in the body in several superimposed layers (three

35  layers being shown in Fig. 1). The fibers 6 are combined to bundles 7 preferably at both ends of the body 5 and extend to the photomultipliers 8.

The following considerations are presented for an understanding of the relationship between illumination intensity and surface ratio of the light collecting surface area (the sum of the surfaces of the various fibers 6) with fibers of different diameters: The illumination intensities

40  achievable at the surface 2, that is, at the light coupling face (interface $n_1/n_2$), correspond to the ratio of light collecting surface areas A which is determined by the radius R of the fibers. With a reduction of the radius R, the cylindrical fiber surface is reduced proportional to R. The circular fiber face, however, is reduced proportional to $R^2$. In order to obtain a constant light collecting surface in the scintillator upon reduction of the fiber diameter, it is necessary to corresponding

45  increase the number of fibers. Since the face area of a fiber bundle decreases exponentially with the fiber radius, the increase in coupling surface by addition of fibers 6 is determined by the equation:

$$\frac{A \text{ fiber} \frac{R_1}{R_2}}{A \text{ fiber} \frac{R_2}{R_1}} = \frac{R_2}{R_1} \quad \text{with } R_1 > R_2 \quad .$$

The large embedded cylinder surface area provides for a reduction of the distance of the scintillator (point) light sources from the adjacent light conductor surface which results in an increase of the light intensity coupled into the fiber light conductor 6.

The following table shows the distances between light source and coupling location for a

60  number of common fiber conductor diameters under the given conditions.

| Fiber Diameter ($\mu$) | Number Of Fibers | Fiber Surface Area ($m^2$) | Distance ($\mu$) |
|---|---|---|---|
| 1500 | 1100 | 8.3 | 400 |
| 1050 | 2270 | 12.0 | 315 |
| 500 | 10000 | 25.1 | 150 |
| 100 | 250000 | 126.0 | 30 |
| 70 | 510200 | 180.0 | 21 |
| 30 | 2777780 | 420.0 | 9 |
| 10 | 25000000 | 1257.0 | 3 |

It is found herefrom that, with fibers of $1500\mu$ and $70\mu$, a ratio of illumination intensity of $1/363$ at the point of light coupling, that is, at the interface $n_1/n_2$, is obtained.

The previous presentation gives some indication for the geometric configuration suitable for a fiber light conductor-detector. Important considerations, however, are also:

The mechanism of the light coupling by way of the fiber surface area.

The transmission characteristics for the light energy coupled into the fibers.

Unisotropic light conductors consist of two components: the core with a refraction index $n_1$ and the coating with a refraction index $n_2$; in connection with light transmission, the electromagnetic energy is concentrated mainly in the material with the higher refraction index $n_1$ (refer to publication [4]).

The propagation conditions are in accordance with the laws of the geometric optics (Snellius-Fresnell laws of refraction and reflection, publication [5]) for the total reflection occurring at the interface to the optically thinner medium. Without detailed explanation of the theory, the following consequences are pointed out:

The transmission of light is based on the principle of total reflection in the optically thinner medium $n_2$. With a finite light conductor diameter, the fiber conductor has discrete propagation conditions (natural mode) depending on the light wave length $\lambda$, the numeric aperture NA and the fiber conductor core radius a.

In contrast to the inference of the teachings of the geometrical optics, during total reflection energy will in fact enter the "forbidden" optical medium of lower density $n_2$ (see publication [6]). Herein, the wave propagation vector $k_0$ is parallel to the interface $n_1/n_2$ and within $n_2$. The light conductor losses of the fiber core in the form of radiation losses into the surrounding material depend on the thickness S of the fiber coating (tunnel region). Generally, the coating thickness is about 7–10 light wave lengths considering multimode fibers and a wave length range of $\lambda \sim 0.5\mu$ (visible light).

There occurs a spiral light propagation which permits coupling of the external scintillator light with the synchronous surface wave field in the tunnel region of the material $n_2$ without an additional coupler (for example, a prism). The light rays produced in the scintillator $LQ_n$ propagate in the shape of a cone and reach the interface $n_1/n_2$ tangentially. Synchronism of the phase velocity and direction of polarization in accordance with the selection of the angles incidence $\gamma_v$ and $\theta'_v$ in the interface area $n_1/n_2$ results in the excitation of the $v^{th}$ electromagnetic natural frequency within the fiber core by way of resonance through the surfaces wave field associated with the natural frequency.

Light coupling by utilization of the geometric effect of the curved optical interface area has, in practice, the following advantages:

There is no need for additional coupling systems usually utilized for the coupling of light into thin optical layers (prismatic couplers).

The coupling mechanism is unisotropic with respect to a preference for the light path of the coupling. As a result, the coupled light energy remains within the fiber conductor for relatively long transmission distances.

The fiber surface represents a coupling area over its full length. Depending on the fiber quality, about 10%/m of the coupled light energy is lost by uncoupling and absorption losses.

For testing of the present detector concept, an area detector element for a revolving door was built as it is known in cross-section in Fig. 2. The detector consists of a block-shaped housing 9 including cover and bottom parts 10, 11 which are bolted together and sealed by a gasket 12 so as to define a cavity 13 adapted to receive a scintillation material body 5 (of Fig. 1). The light conductor fiber bundles 7 extend through the two stubs 14, 15 which are arranged diagonally and support the bundles 7.

The sensitive detector surface is 900 cm². The diameters of the single fibers were $1500\mu$ embedded in a single layer in a ZnS(Ag) boric acid matrix. The use of fibers with such a large cross-section is disadvantageous from an optical point of view but it has a practical advantage as

the larger fibers are easier to handle. In order to achieve a sufficiently high uncoupling efficiency with the relatively thick fibers as utilized, the fiber coating surface (outer interface area $n_0/n_2$) was roughened. The scattering centers so generated on the surfaces act like an optical grid coupler as it is used in connection with flat light guides. Scattering of the scintillator light
5 reaching the interface $n_1/n_2$ normal to the surface into directions of incidents which are suitable (synchronous) for the coupling with the surface waves results in a 20 fold increase when compared with a smooth surface.
    Measurements of the $\gamma$ sensitivity were performed under the following circumstances:
    Optimal amplifier parameters were set on the basis of the specifications given in the data
10 sheets of publication [7] and by trial and error. The electronic amplifier circuitry utilized (photomultiplier Phillips XP 2230) is identical with that of the IRT liquid scintillator system for $\gamma$ radiation detection.
    The discriminator threshold Uu and window with Uw were determined on the basis of the signal/background noise ratio $S^2/B$ for various $\gamma$ energy levels. The energy range taken into
15 consideration includes Am-241 ($\bar{E} \simeq 60$ keV at Uu$\simeq$0.1V), Ba-133 ($\bar{E} \simeq 360$ keV) to Co-60 ($\bar{E} \simeq 1170$ keV).
    The discriminator setting was determined as a result of the measurements as Uu = 0.1V and Uw = 3.0V.
    The signal/background noise ratio at different distances of the sources from the detector plate
20 in relation to the center of the plate is shown in Fig. 3. Also marked in Fig. 3 as a line is the value $S^2/B = 5.650^2$ corresponding to a detection probability of 95% at a false alarm rate of 0.01%. The alarm threshold, set at $4\sigma$, takes changes in the stability of the electronic circuitry into consideration. The detection probability of 95% corresponds to a net signal $S = G - B$ of $1.65\sigma$ above the alarm threshold.
25     The required signal/background noise ratio is given by

$$S^2/B = (5.65\ B)^2/B = 32$$

independently of the absolute counting rate B. $S^2/B$ is a quality measure for the detector which
30 is essentially independent of the setting of the amplifier parameters.
    The measuring results as given in Fig. 3 were determined with various distances z from the center of the plate $(x,y) = (5,5)$.
    Fig. 4 shows for z = constant the signal/background noise ratio $S^2/B$ depending on different distances from the photomultiplier between a minimum distance of 30 cm and a maximum
35 distance of 60 cm.
    The results confirm the operability of unisotropic light conductors as collectors and transmitters even with conductors with relatively large cross-sections. The differences between neutron and $\gamma$ radiation counting rate efficiencies, as they are to be expected because of the different signal strengths, permit the conclusion that the ZnS(Ag) boric acid detector may be utilized also
40 as a $\gamma$ radiation detector wherein signal separation may be obtained by the setting of different energy threshold levels.

*LISTING OF LITERATURE*
    [1] K. H. Sun, P. R. Malmberg, F. A. Pecjak Scintillation Counters
45     [2] W. S. Emmerich A Fast Neutron Szintillator Rev. Scien. Inst., Vol. 25, No. 1, Jan. 1954
    [3] W. B. Allan Fibre Optics, Theory and Practice Plenum Press, London, N.Y. 1973
    [4] N. S. Kapany, J. J. Burke Fiber Optics IX. Waveguide Effects J. Am. Opt. Soc. Vol. 51, No. 10, Oct. 1961
    [5] W. Pohl Optik und Atomphysik Springer 1928
50     [6] M. Born Optik Springer, Berlin 1933
    [7] W. S. C. Chang Periodic Structures and their Application in integrated Optics IEEE Trans. on Microwave Theory and Techniques, Dec. 1973, p. 775 ff

CLAIMS
55     1.   In a detection system for detecting radiation including neutron and gamma radiation, which system has a large reception surface for the radiation to be detected, said radiation being adapted to generate light energy within a scintillation material which light energy is coupled into fiber light conductors, the improvement, wherein said fiber light conductors are so embedded in the scintillation material that they extend across the reception surface thereof wherein said fiber
60 light conductors, provided with a coating, are unisotropic and coupling of the light energy into the fiber light conductors takes place along the whole surface of the fiber light conductors.
    2.   A detection system according to claim 1, wherein said fiber light conductors are embedded in the scintillation material parallel to one another in a number of layers which are disposed parallel to the reception surface.
65     3.   A detection system according to claim 1, wherein a light sensor (photomultiplier) is

arranged at the end of the fiber light conductors, the arrangement being such that uncoupling of the light from said fiber light conductors takes place at the end faces of the fiber light conductors.

4.  A detection system according to claim 1 wherein said fiber light conductors are
5  symmetrically cylindrical so that the index of refraction ($n_1$) of the fiber light conductor core is larger than that ($n_2$) of the coating surrounding the conductor core.

5.  A detection system according to claim 1, wherein the surface of the fiber light conductor coating is roughened.

6.  A detection system according to claim 1, wherein said reception surface is rectangular in
10  shape.

7.  A detection system substantially as hereinbefore described with reference to and as illustrated in the accompanying drawings.

THIS PAGE BLANK (USPTO)